



Automatikwerk
Self-winding movement
J800.4

Congratulations on becoming the owner of an original Junghans!

Junghans watches are and always have been something special. They have made watchmaking and design history. And we are still doing so today. For the story of success that began in 1861 in Schramberg in the Black Forest continues with each new model. Present in every watch are the elements that make Junghans special: style, passion, innovative spirit and precision right down to the tiniest detail. Put another way: when traditional craftsmanship, leading edge watch technology and classy design come together, then it is a genuine Junghans. A watch for all those who live their own style – and on that we can not do other than congratulate you!

Your

Uhrenfabrik Junghans GmbH & Co. KG

Contents

Instructions for use

Page

17

General information

22

Instructions for use

Important note:


Your watch has a screwed crown. In order to use the crown, unscrew it by turning it anticlockwise. Then push the crown back to position A and screw it in by turning it clockwise.

Winding the watch

The automatic movement can be wound manually in crown position A.

A minimum of 2 to 3 rotations of the crown is required to actuate the movement. If the watch has not been worn for a long time and has therefore come to a standstill, you can wind it manually (see „Fully wound“ technical information). A minimum winding of 20 turns is recommended. Movement of the watch when worn on the wrist generates the necessary energy. When fully wound, maximum power reserve is guaranteed.

Features and functions

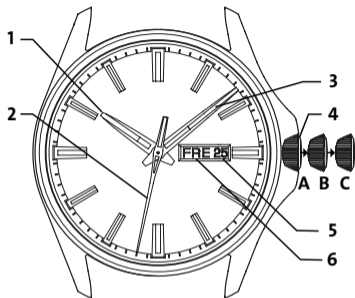

- 1 Hour hand
- 2 Second hand
- 3 Minute hand
- 4 Winder
- 5 Date display
- 6 Week day display

Adjusting the time

Pull the crown into position C. This stops the watch. To set the watch to the precise second, it is best to stop the movement when the second hand passes over the '60' mark. Then position the minute hand precisely to the minute marker in order to set the desired time. To start the second hand, push the crown back to position A and screw the crown in place.

Important note:

Do not make any changes to the date between 08:00 p.m. and 02:00 a.m., as the date is automatically advanced by the movement during this period and you could damage the date advance mechanism.

Setting the date

Pull the crown into position B. Turn the crown clockwise to set the date. If you do not wish to make any further adjustments, push the crown back to position A and screw the crown in place.

Setting the weekday

Your watch has the option of setting the weekday in German or English. Pull the crown to position B. Turn the crown anticlockwise to set the weekday:

- 1 crown rotation = change the language
 - 2 crown rotations = next day in the set language
- Then push the crown back to position A and screw the crown in place.








Technical information

Calibre J800.4

- Self-winding movement with display for date and weekday
- Bi-directional winding
- Fully wound: min. 27 crown rotations
- 28,800 semi-vibrations per hour
- 38 hour power reserve
- Anti-magnetic to DIN 8309
- Shockproof: Nivachoc
- Balance: Gold-plated nickel

Water resistance

Marking	Instructions for use				
	 Washing, rain, splashes	 Shower	 Bath	 Swimming	 Diving without scuba tanks (snorkelling)
No mark	No	No	No	No	No
3 BAR	Yes	No	No	No	No
5 BAR	Yes	No	Yes	No	No
10 BAR	Yes	Yes	Yes	Yes	No
20 BAR	Yes	Yes	Yes	Yes	Yes
30 BAR	Yes	Yes	Yes	Yes	Yes

The water resistance as prescribed by DIN is a design engineering characteristic which is susceptible to external influences such as shock, fluctuations in temperature, UV light and direct contact with cosmetics and cleaning products (greases and acids). The “3–30 BAR” condition is thus only applicable for brand new watches. We recommend having the watch inspected at regular intervals.

General information

The water resistance of your watch can be affected by external influences, which can cause moisture to enter the watch. We therefore recommend regular checkups by a Junghans specialist. Servicing and bracelet repairs should also be carried out by an authorised Junghans service partner.

Please avoid direct contact with alcohol containing perfumes, disinfectants and chemical cleaning detergents (e.g. petrol or paint thinner), as this will shorten the life of the glass, gaskets and leather strap.

Your watch is equipped with a quality strap which has been tested inhouse several times. If you would like to change your strap please use a strap of the same quality, preferably an original strap. The watch and leather straps can be cleaned with a dry or slightly damp cloth. Metal bracelets should preferably be cleaned with a small brush and soapy water.



Uhrenfabrik Junghans GmbH & Co. KG
Geißhaldenstr. 49 · D-78713 Schramberg
www.junghans.de · info@junghans.de